## **Action Bullet Resistant Transaction Window**

## **Installation Instructions**

- All lifting and handling of the transaction windows should be accomplished in a manner to avoid
  placing stress on the attachment of the vertical channel at the parcel shelf. Ideally the use of
  heavy-duty glass suction cups is recommended. Pay special attention to the "GLAZE THIS SIDE
  OUT" sticker.
- 2. Provide a finished opening in the wall with sufficient clearance to accept the transaction window.
- 3. Carefully lift the transaction window into a finished opening and shim if required. Screw or anchor unit in place at the top and bottom of both verticals on each side of glass (8 total).

**NOTE:** Where counters of greater depth than shown are used, or where counters have been detached to better facilitate shipping, the installation should be done as follows.


- 1. If more than one unit is to be installed determine the correct units for each opening as required.
- 2. Position counter and level in all directions.
- 3. Mark anchor holes through mounting clips if used due to excessive depth.
- 4. Remove counter and drill necessary holes.
- 5. Remove counter and secure anchors through mounting clips.
- 6. Position correct glazing and frame counter, plumb, and attach as in #3 above.

## **Maintenance and Cleaning**

Never use abrasive type cleaning products such as "comet" on bright metal frame or glazing. Regular cleaning with "Windex" type cleaner (liquid or spray liquid, non-abrasive) on metal parts and glass only is recommended. For polycarbonates wash with mild soap or detergent. Avoid excessive application of strong solvents.

## INSTALLATION PROCEDURES

- PROVIDE A FINISHED OPENING IN THE WALL WITH SUFFICIENT CLEARANCE TO ACCEPT THE TRANSACTION WINDOW
- 2) INSTALL TRANSACTION WINDOW UNIT "a" INTO OPENING AND ANCHOR IT ONTO PLACE
- 3 INSTALL NATURAL VOICE SPACER "6" AND BOTTOM GLAZING CAP "6" INTO GLAZING
- (4) CAREFULLY SLIDE GLAZING ASSEMBLY INTO FRAME
- (5) INSTALL REMOVABLE STOP "d" AND SCREW "e" INTO FRAME.

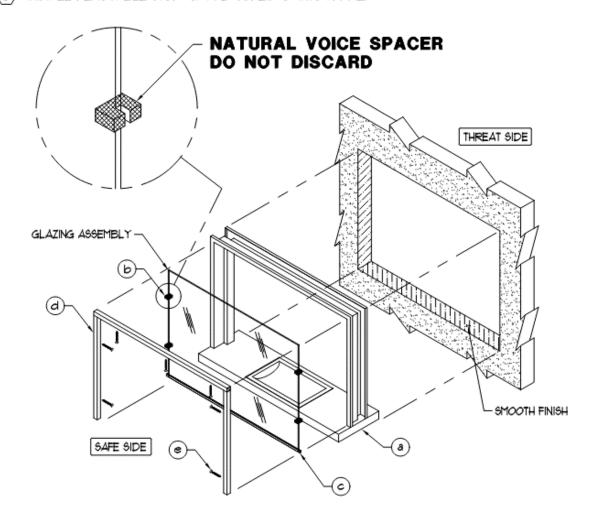

THREE SIDED HOLLOW METAL TRANSACTION WINDOW INSTALLATION (NATURAL VOICE)